

Thrane & Thrane



NERA WORLDPRO 1000/1010

The Ultimate Communications Tool On The Move

The **Nera WorldPro 1000/1010** is the ultimate tool for professionals working in exceptional circumstances, stopping at each remote site for only a brief period before moving on, needing a makeshift “office” instantly.

Nera has created an integrated and *extremely compact* communications device for Inmarsat’s global *broadband data and voice services (BGAN)*. The **Nera WorldPro 1000** series is extremely easy to set up and use, so you can stay connected anywhere on the planet.

NERA WORLDPRO 1000/1010

The Ultimate Communications Tool On The Move

THE SMALLEST AND LIGHTEST BROADBAND SATELLITE TERMINAL

Half the size of a laptop and weighing less than 1 kg, the Nera WorldPro 1000 series meets the toughest demands for portability. Built for persistent travel and bumpy rides, the terminal can be dropped onto concrete without breaking and works just as well in a dusty desert as in a humid rain forest.

BROADBAND AND VOICE – SIMULTANEOUSLY



With data rates of up to 384 kbps, users of the Nera WorldPro 1000 series can make use of bandwidth-hungry applications anywhere without experiencing any performance issues. Simultaneously, the same terminal can receive and transmit high-quality voice calls.

COMPLETE FLEXIBILITY – INDOORS AND OUTDOORS

In order to cater for comfortable and secure indoor usage in inhospitable environments, the Nera WorldPro 1000 series can be split into two units. Both USB*, ISDN, Ethernet* and Bluetooth interfaces deliver further flexibility for users constantly adapting to new situations.

NO PLUG – JUST PLAY

The Nera WorldPro 1000/1010 one-patch antenna makes it extremely easy for a user to find the satellite communications signal. Self-explanatory indicators ensure that the terminal is straightforward to operate.

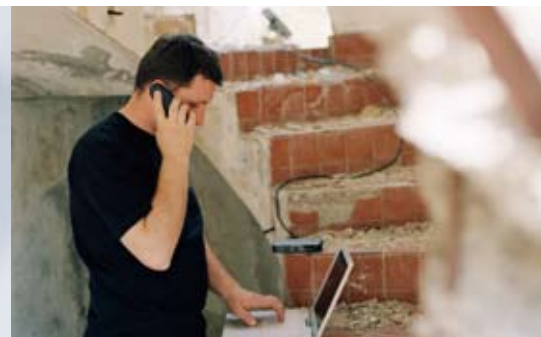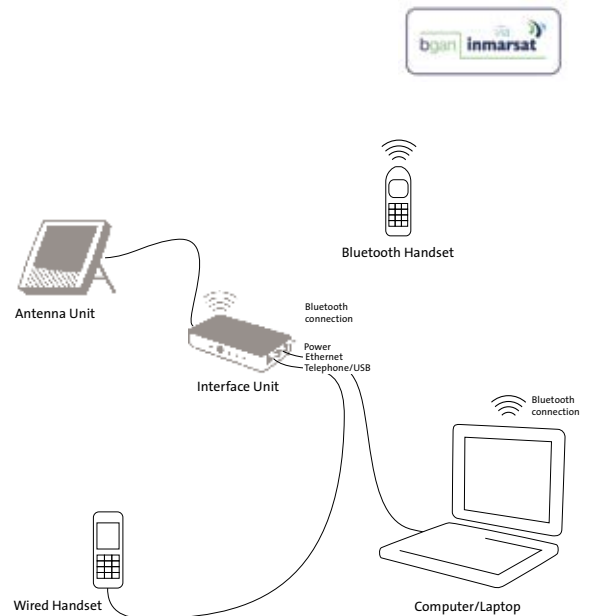

TECHNICAL SPECIFICATIONS

Data Rates

Transmit	240 kbps
Receive	384 kbps
Streaming	32, 64 kbps symmetrical

Power

Input voltage	100 – 240 VAC +/- 10% 50 – 60 Hz 800 mA
Output voltage	12 VDC +/- 10%

Interfaces

USB (Nera WorldPro 1000)	1 connector, USB v1.1
USB data rate	Up to 12 Mbps
Bluetooth	Built-in Bluetooth antenna, Bluetooth v1.1
Bluetooth data rate	432.6 kbps
ISDN	1 RJ-45 connector for voice handset (max 1,5 W)
Ethernet* (Nera WorldPro 1010)	RJ-45

Environmental

Storage terminal	-40 °C to +80 °C
Storage battery	-20 °C to +40 °C
Operational	-20 °C +55 °C, 95% non-condensing humidity at 40 °C
Light	500 W/ m ² infrared, 54 W/ m ² ultra violet
Visible sunshine	1120 W/ m ² MIL-SPEC 810E 505.3
Sealing class	IP44

Antenna Performance

Gain	Tx 8.5 dBic Rx 8.5 dBic
Beam width	+/- 30°
G/T	-18.5 dB/ K
EIRP	10 dBW
Frequency range	L-band Tx 1626.5 – 1660.5 MHz, Rx 1525.0 – 1559.0 MHz

Battery

Type	7.2 Volt 2400 mAh Li-Ion rechargeable
Standby	36 hours
Typical use	5 hours 20% activity factor
Maximum transmission	1 hour continuous transmission at > 72 kps at nominal EIRP at edge of coverage and edge of beam
Maximum reception	1 hour continuously at full rate
Time to full charge	3 hours

Physical Data

Weight	995 g including battery
Dimensions	20 x 15 x 4.5 cm (Interface Unit 14.5 x 9.2 x 2.7 cm, Antenna Unit 15 x 20 x 4.5 cm)
Distance Interface Unit	
– Antenna Unit	Maximum 30 m
Distance Interface Unit	
– Bluetooth device	Maximum 30 m